


TPMR Management method comparisons (v2)



Aims of TPMR Management

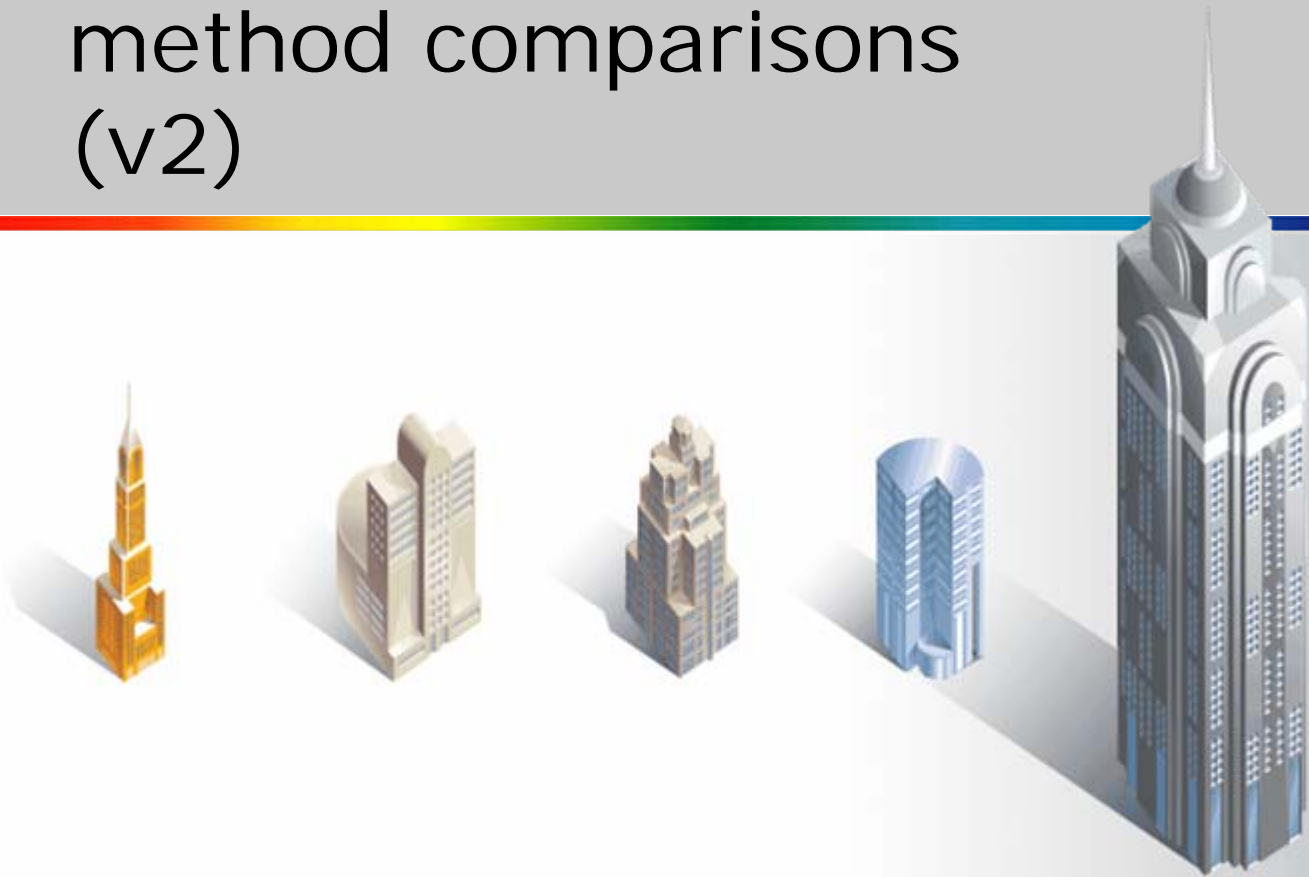

- Scope: This standard specifies the function of a MAC Relay with two MACs, and the protocols and procedures to support its operation. A MAC Relay is transparent to all frame-based media independent protocols except those explicitly addressed to this device. **It is remotely manageable through at least one of its external MACs**, and signals a failure of either MAC's LAN through the other MAC.
- "... providing the manageability and remote diagnostic capabilities traditionally offered by circuit switched technologies."
- It's likely that a device managing a chain of TPMRs would want to incorporate their managed objects into its own, to avoid NMS interaction with each TPMR.

Requirements of a management scheme



- Management protocol and method
 - Examples include CORBA, SNMP, EFM
- Transport protocol
 - Examples include TCP/IP, plain Ethernet
- Addressing scheme
 - IP addresses with IP routing, or
 - Ethernet addresses with a L2 discovery protocol
- Managed objects
 - A basic set of these should be required by the standard
 - For example: port rate control and status, auto-negotiation selection, fan status, unit temperature
 - Additional objects should be supportable from other standards or vendor extensions

Pros and Cons of EFM for TPMR management



- EFM OAM is part of IEEE Std 802.3ah-2004, aimed at link maintenance and link management
- Pros
 - Part of a standard which is likely to be used by many TPMRs for its link maintenance capabilities
 - Already deployed in the field for such devices
 - Provides the ability to read managed objects and signal events
 - Extensible (using OUIs), so write operations could be added
- Cons
 - Doesn't scale well to management of chains
 - Only available on Ethernet links (and arguably not all of them)
 - Single DA - doesn't address management of multiple units
 - Limited bandwidth (10 frames per second max)
 - Management semantics are insufficient and extending them is hard to do well (e.g., no "Set")

Pros and Cons of SNMP for TPMR management



■ Pros

- Widely deployed and understood
- MIBs for devices will have to be developed anyhow, so re-using them for in-band management saves effort
- Already deployed (but maybe differently)
- The MIB of a remote TPMR can be combined into the MIB of another device managing it
 - Use a proxy, or
 - Wrap the remote objects into the managing device's interface and entity MIBs

■ Cons

- More complex than EFM, requiring a more capable device, so probably more costly

Pros and Cons of CORBA for TPMR management



- Pros
 - CORBA is the future of device management (so we hear)
 - More sophisticated management operations
 - Possible to combine remote and local objects in a similar way to SNMP
- Cons
 - Yet more complex than SNMP, so more costly
 - Not deployed already, so steeper learning curve
 - CORBA requires a reliable transport protocol as it is byte-stream based

Transport protocol and addressing scheme



- Users don't want to administer an IP address per TPMR
- A layer-2 addressing scheme avoids this
- A layer-2 discovery scheme would also be needed to allow topology discovery and automatic containment relationships to be established
 - LLDP could be used for this

Turning
metro visions
into value



Thank you

jmessenger@advaoptical.com